

cyrilla round

An elegant and efficient post top luminaire with clear diffuser provide a unique, comfortable light choice with symmetrical and glare free light distribution. Crafted with a robust, aesthetically appealing construction, the cyrilla round is built to withstand all weather conditions, providing reliable performance over time. Its durable materials and design ensure that it maintains its initial lighting quality throughout the lifetime of the installation, making it a smart and long-lasting lighting solution for outdoor spaces.

Product Description

- The luminaire body made of die-cast aluminium alloy with decorative embellishment.
- Clear polycarbonate diffuser.
- Luminaire integrated with 30W LED.
- Suitable for mounting on 50mm OD pipe.
- Cable entries for through-wiring of mains supply cable
- Integral constant current power supply
- CRI (Ra) : >70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24379-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K

Product Benefits

- Elegance, Functionality.
- Corrosion resistant and Maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Commercial complex, Residential roadways, Walkways, Streetscapes & office complex.

Available Finish

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey





Technical Specifications

General

ID	: 24379
System Wattage	: 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium Alloy
Diffuser	: Clear polycarbonate
Mounting	: Suitable for Mounting on Ø50mm OD Pipe

Finish	: Powder coated
	RAL 9004 Black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical / Asymmetrical (On Request)
--------------------	---

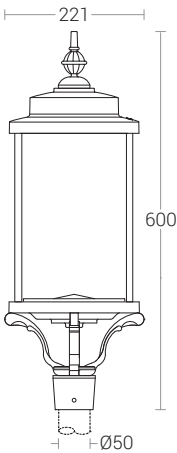

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in