



BDA HOUSING PROJECT-SUBUDHIPUR, BHUBANESWAR



Technical Specifications

General

ID	: 24454
System Wattage	: 30W / 50W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Clear Polycarbonate
Optical Lens	

Mounting	: Suitable for mounting on 91mm Square Pipe
----------	---

Finish	: Powder coated
	: RAL 9004 Black
	: RAL 9007 Grey aluminium
	: RAL 7016 Anthracite grey
	: Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV / 6KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Type III
--------------------	------------

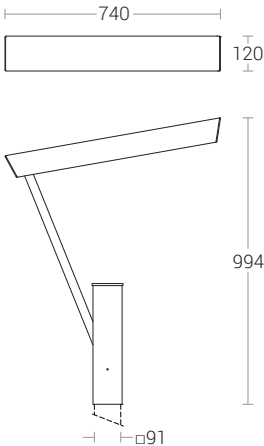

Photometric Data

