K-LiTE Spectra 2.0





OPEN SOURCE

Technical Specifications General

ID : 24460 / 24461 :50W / 100W LED System Wattage Driver Integral : Constant Current Operating Voltage : 100-265Vac Operating Temperature :-15°C~+50°C

Physical

Body : Extruded Aluminium Diffuser : Polycarbonate Optical Lens : Suitable for mounting on Mounting Ø76 / Ø88.9 / \square 72 / \square 91 Finish : Powder coated RAL 9004 Black RAL 9007 Grey aluminium

RAL 7016 Anthracite grey Graphite grey

Light Source

Light Source : LUMILEDS / OSRAM CRI (Ra) :≥80

LED Colour Temperature : 2700K / 3000K / 4000K


/ 5700K

Driver

Power Supply : Integral Input Voltage : 230-240Vac Frequency : 50-60Hz Power Factor :>0.95 THD :<10% Surge Protection : 6KV Efficiency :>85%

Optical Performance

Light Distribution : Type II
















K-LiTE Dual Spectra 2.0

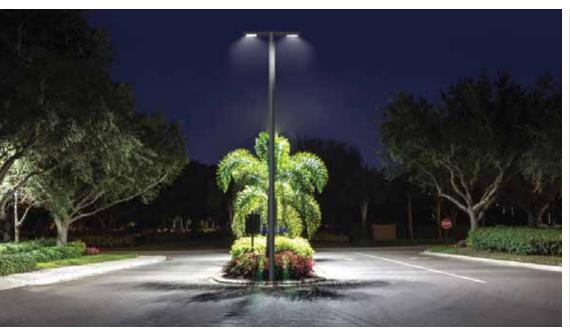



OPEN SOURCE

Technical Specifications General

ID : 24460 / 24461 : 100W / 200W LED System Wattage Driver Integral : Constant Current Operating Voltage : 100-265Vac Operating Temperature :-15°C~+50°C

Physical

Body : Extruded Aluminium Diffuser : Polycarbonate Optical Lens : Suitable for mounting on Mounting Ø76 / Ø88.9 / \square 72 / \square 91 Finish : Powder coated RAL 9004 Black

RAL 9007 Grey aluminium RAL 7016 Anthracite grey

Graphite grey

Light Source

Light Source : LUMILEDS / OSRAM CRI (Ra) :≥80

LED Colour Temperature : 2700K / 3000K / 4000K

/ 5700K

Driver

Power Supply : Integral Input Voltage : 230-240Vac Frequency : 50-60Hz Power Factor :>0.95 THD :<10% Surge Protection : 6KV Efficiency :>85%

Optical Performance

Light Distribution : Type II

