





PLATINA

A comprehensive range for
hospitality lighting




Made in high density die-cast aluminium for excellent heat management. A wide variety of baffles and forms are available for distinctive architectural requirements. Low UGR and high Colour-Rendering Index features enable Platina to deliver excellent performance & visual comfort. Tunable white and Dimmable are optional solutions.

PLATINA

An aesthetic selection of downlighting and wallwashing

Platina is a family of recessed LED spots that comes in a wide range of different sizes and glare-limiting reflector finishes. Symmetrical or asymmetrical optics - either fixed or tiltable - are available.

The variety of luminous flux, appearance options and dimming protocols present Platina as an unbeatable option for architectural lighting applications.

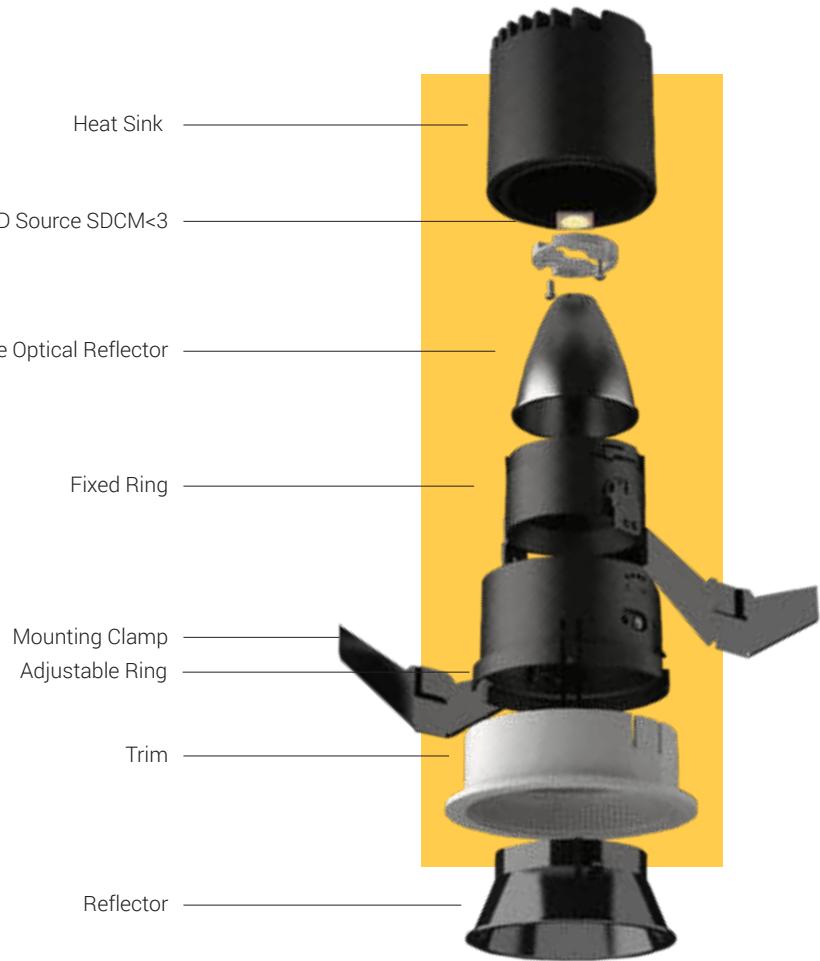



Technical Specifications

General

Driver Integrated	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source / LED chip	: CITIZEN
Flicker	: Flicker Free
CRI (Ra)	: 90
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

Physical

Body	: Die-Cast Aluminium
Diffuser	: Polycarbonate
Reflector	: Chrome
Louvre	: Honey Comb (On Request)
Mounting	: Ceiling Recess / Adjustable
Finish	: Powder coated White

Driver

Power Supply	: Integrated
Input Voltage	: 240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <12%
Surge Protection	: 2 to 3KV
Efficiency	: 88%

Optical

Tilt	: Yes
Beam Angle	: 15° / 24° / 40°



PLATINA MICRO

ID	Wattage	Dimension	C.O.D
23327	6W Trim	Ø58 x 75	Ø52

PLATINA MINI

23328	12W Trim	Ø85 x 104	Ø75
-------	----------	-----------	-----

PLATINA MIDI

23329	20W Trim	Ø105 x 120	Ø96
-------	----------	------------	-----

PLATINA MAXI

23330	35W Trim	Ø133 x 143	Ø120
-------	----------	------------	------